


Unbraided Flexible Sprinkler Hose "NEWAGEFLEX"

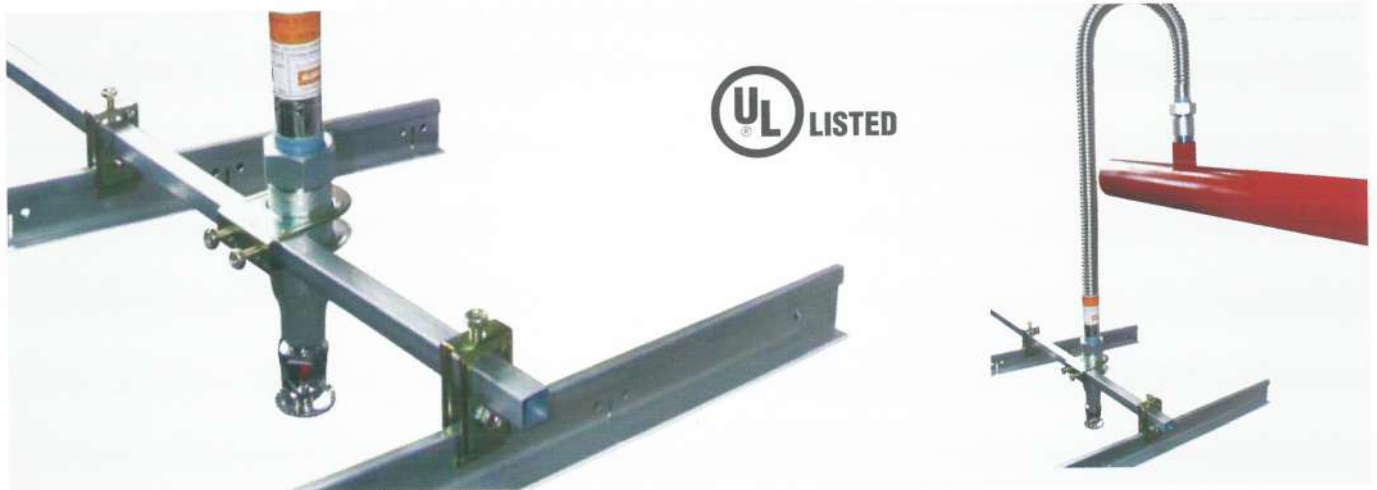

UNBRAIDED FLEXIBLE HOSE

MODEL	NI25UB-07	NI25UB-10	NI25UB-12	NI25UB-15	NI25UB-18
LENGTH (in MM)	700	1000	1200	1500	1800
Max.Working Pressure	200 PSI	200 PSI	200 PSI	200 PSI	200 PSI
Inlet Nipple	1" BSPT	1" BSPT	1" BSPT	1" BSPT	1" BSPT
Outlet Reducer	1/2"NPT OR 3/4"NPT	1/2"NPT OR 3/4"NPT	1/2"NPT OR 3/4"NPT	1/2"NPT OR 3/4"NPT	1/2"NPT OR 3/4"NPT
Material of Construction	SS 304	SS 304	SS 304	SS 304	SS 304
SUITABLE K-FACTOR	5.6 & 8	5.6 & 8	5.6 & 8	5.6 & 8	5.6 & 8
Approval	UL Listed				
MODEL	NFAP25-07	NFAP25-10	NFAP25-12	NFAP25-15	NFAP25-18
LENGTH (in MM)	700	1000	1200	1500	1800
Max.Working Pressure	200 PSI	200 PSI	200 PSI	200 PSI	200 PSI
Inlet Nipple	1" BSPT	1" BSPT	1" BSPT	1" BSPT	1" BSPT
Outlet Reducer	1/2"NPT OR 3/4"NPT	1/2"NPT OR 3/4"NPT	1/2"NPT OR 3/4"NPT	1/2"NPT OR 3/4"NPT	1/2"NPT OR 3/4"NPT
Material of Construction	SS 304	SS 304	SS 304	SS 304	SS 304
SUITABLE K-FACTOR	5.6 & 8	5.6 & 8	5.6 & 8	5.6 & 8	5.6 & 8
Approval	UL Listed				